



## NEW




The replacement pre-filter for the EZChange Whole Home filter is used to prevent sediment particles from entering and clogging the main filter unit.

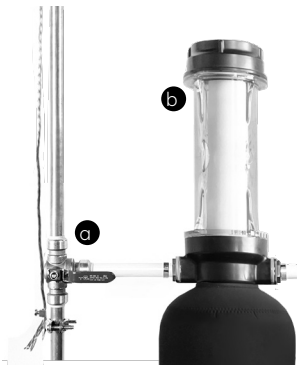


- a Entry valve
- b Pre-filter top cap


- 1 Locate and turn the entry valve 90 degrees to the "off" position.

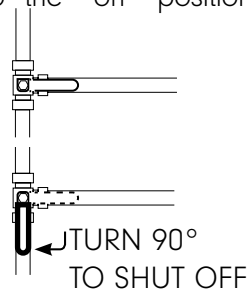


- 2 Relieve water pressure by running the tap in the basement for 15 seconds.




- 3 Firmly hold the housing and unscrew the top cap counter-clockwise off.

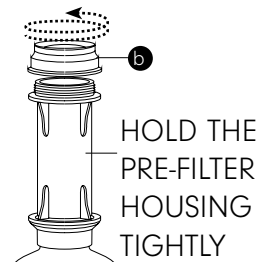


- 4 Pull out the old 11 inch Pre-filter and drop in the new Pre-filter

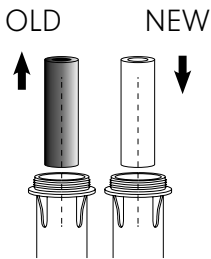


- 5 Check that the O-Ring fits securely inside cap

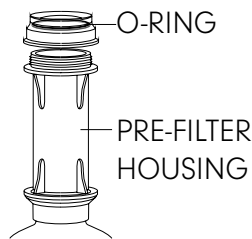

- 6 Screw the top cap clockwise on tightly.

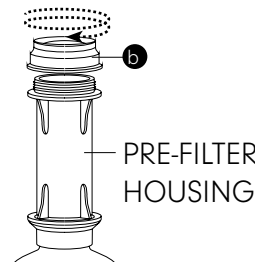

- 7 Slowly open entry valve 90 degrees to the "on" position.

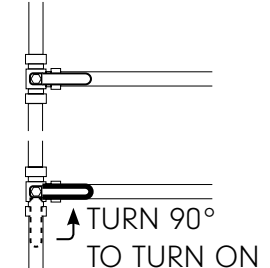

**Not sure when to change your pre-filter? Give us a call!**



**CAN: 1-800-408-5314**

**USA: 1-855-464-9736**

## MOVING SOON?

If you are moving or selling your home we have options for the transfer of your water filtration services.

**Call or email customer service** to arrange the transfer.

**customerservice@homewater.com**

**www.homewater.com**